


# Circulation With External Buffer Fluid Tank

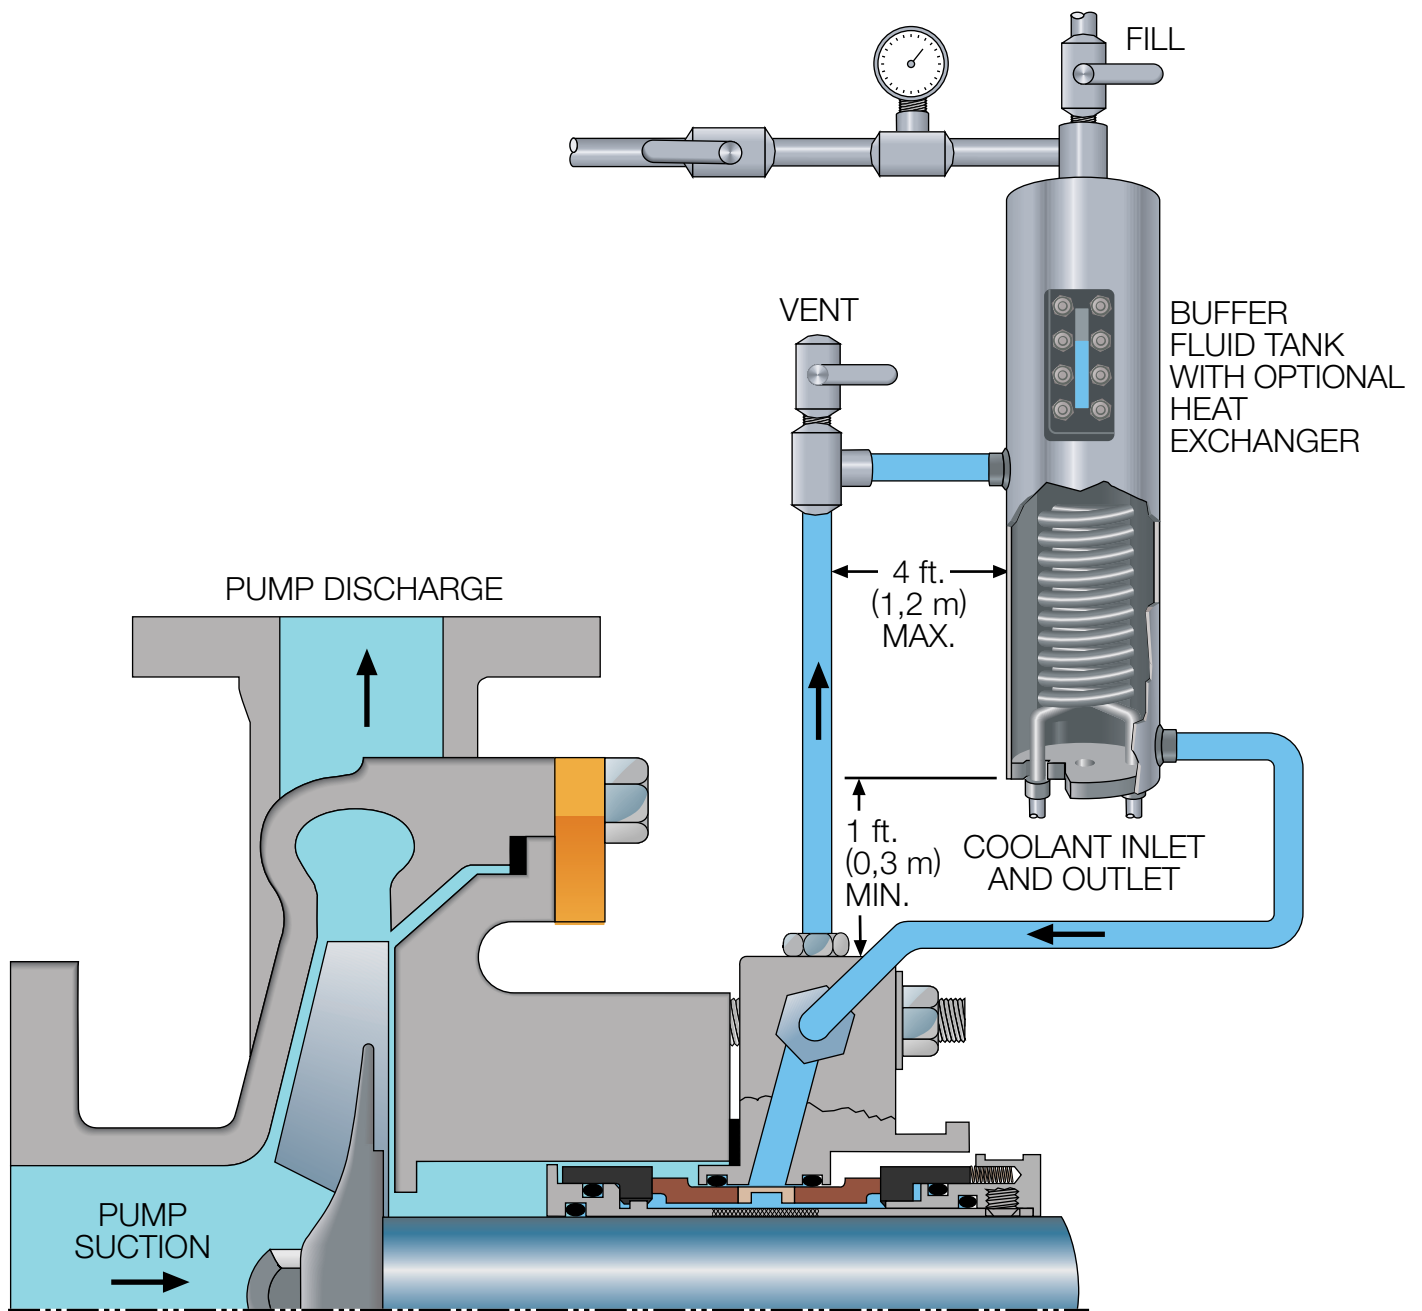

- Use with a dual seal
- Low pressure buffer fluid, 10 psi minimum
- Buffer fluid should be clean, compatible, and lubricating
- Gland inlet and outlet connections dependent on shaft rotation