
Cooled Discharge Recirculation

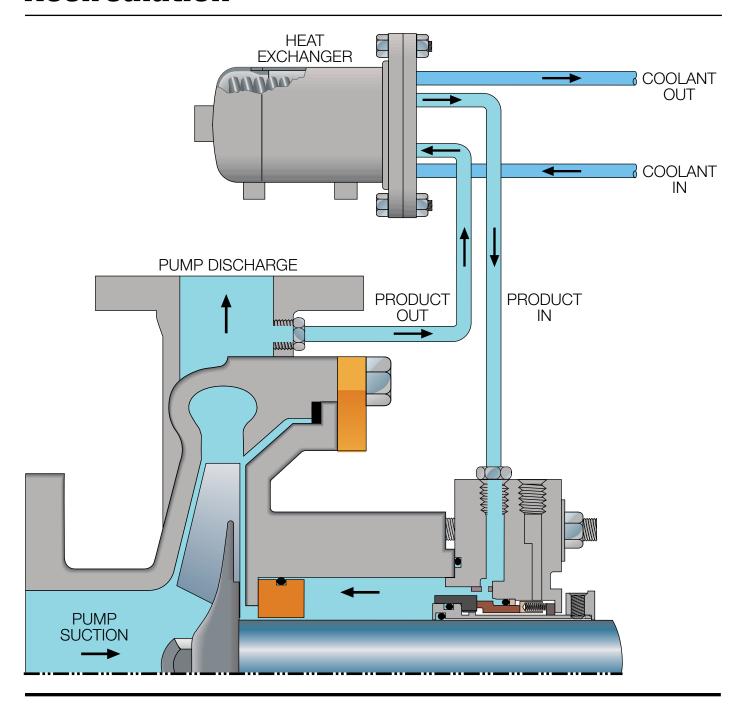

- Use with a single sealCools seal with hot pumps and/or volatile fluids
- Increases pressure in seal chamber
- Solids in product can erode seal An orifice can be used to reduce flow