


150

SINGLE CARTRIDGE SEAL

FOR GENERAL INDUSTRIAL APPLICATIONS

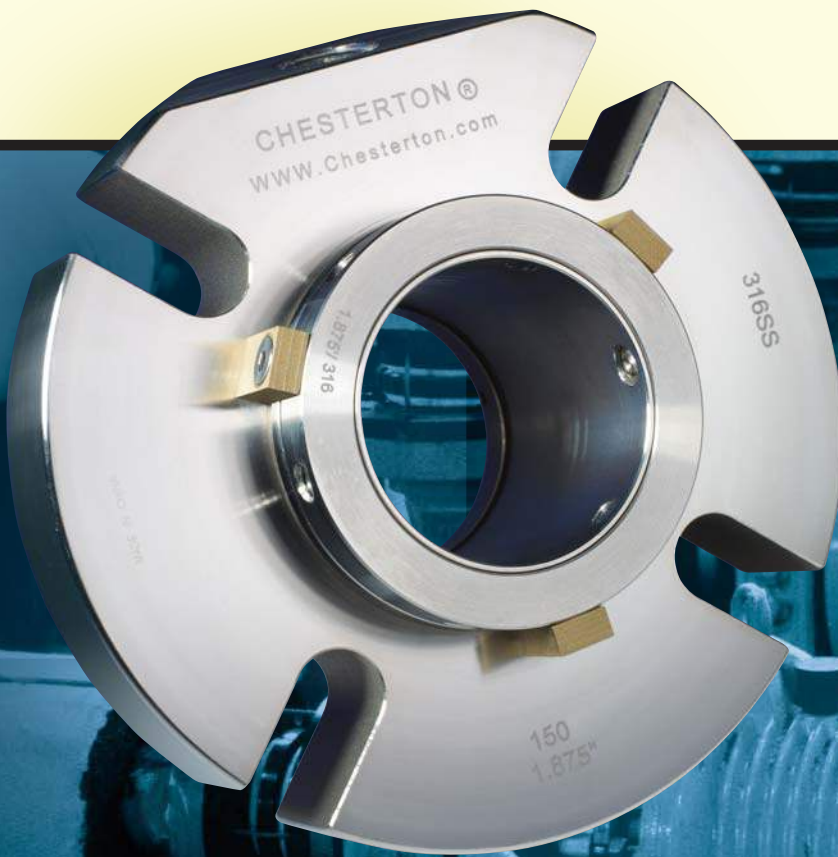

GENERAL INDUSTRIAL SEALING

150



SIMPLE, RELIABLE, AND AFFORDABLE

With proven Chesterton quality, the 150 is a value leader in its class. It is the ideal choice to reduce high maintenance costs and prevent wasteful leakage, shaft fretting damage, and inefficient downtime.

Designed for baseline applications and for upgrading packed or component sealed equipment, the 150 seal makes general industrial sealing simple, reliable, and affordable.


Advantages of upgrading to the 150 preassembled cartridge design:

- Prevents shaft fretting and O-ring damage
- Eliminates measuring, minimizing installation error
- Increases seal life with a proven, balanced design
- Saves shaft sleeves from packing wear
- Eliminates leakage associated with packed pumps

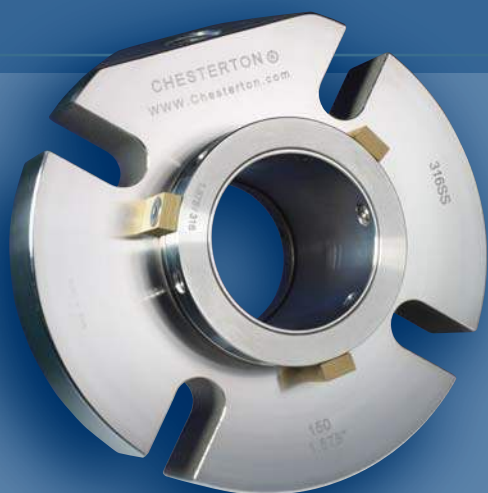

The 150 is the economical solution to meet the needs of today's industry.

- Constructed of high quality materials
- Fits popular ANSI/ISO and vertical pumps
- Fast and easy installation
- Field and factory reparability
- Optional quench and drain capabilities
- Worldwide, off-the-shelf availability

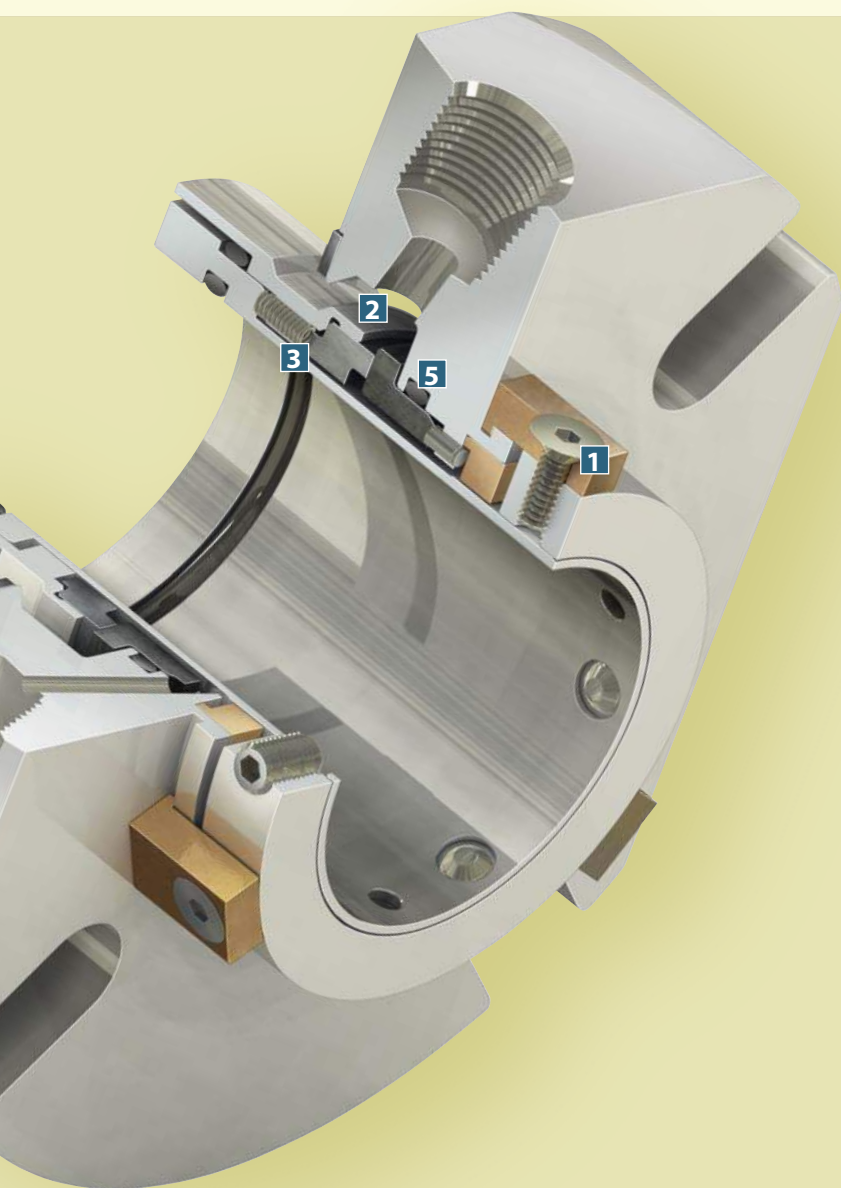

1 Installs Easily and Accurately

Multi-directional centering clips automatically position the seal and set consistent spring pressure.

2 Improved Cooling

The gland annulus provides significantly more process fluid at the seal interface for effective cooling. This is particularly beneficial where tight pump clearances exist.

3 Avoids Clogging

Multi-coiled springs provide even, consistent face load, and are placed out of the sealing fluid to avoid clogging.

4 Enhanced Torque Capabilities

Heavy-duty drive lugs reduce wear damage and handle higher starting torque.

5 Optimized Seal Face Geometrics

Through finite element analysis, the composite seal face design is optimized to improve lubrication and extend seal life.

6 Quench and Drain Option

Quench and Drain option allows the 150 to be applied to a wider range of applications.

Standard Offerings

Size Range	25 mm (1") – 120 mm (4.75")
Hardware	316 Stainless Steel/EN 1.4401
Two Standard Gland Offerings	Flush Only Flush, Quench, and Drain
Seal Face Combination	CB/SSC SSC/SSC
O-Rings	EP, FKM, and FEPM as standard Chemlast™ available upon request

Operating Parameters

Operating Speed	Up to 3600 RPM
Pressure Rating*	Vacuum to 20 bar g (300 psig)
Temperature	-30°C to 200°C (-20°F to 400°F)

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations.



GLOBAL SOLUTIONS, LOCAL SERVICE

Since 1884, Chesterton has been providing value driven solutions to meet industry's needs. Chesterton solutions have been implemented around the world with documented success and recognition. Increasing equipment reliability, optimizing energy consumption, and providing local technical support and service are what Chesterton offers industry worldwide.

- Servicing Plants in Over 100 Countries
- Global Manufacturing Operations
- Over 500 Service Centers and Sales Offices Worldwide
- Over 1200 Trained Local Service Specialists and Technicians

Visit our website at
www.chesterton.com

Chesterton ISO certificates available on www.chesterton.com/corporate/iso



Technical data reflects results of laboratory tests and is intended to indicate general characteristics only.
A.W. CHESTERTON COMPANY DISCLAIMS ALL WARRANTIES EXPRESSED, OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE OR USE. LIABILITY, IF ANY, IS LIMITED TO PRODUCT REPLACEMENT ONLY.
ANY IMAGES CONTAINED HEREIN ARE FOR GENERAL ILLUSTRATIVE OR AESTHETIC PURPOSES ONLY AND ARE NOT INTENDED TO CONVEY ANY INSTRUCTIONAL, SAFETY, HANDLING OR USAGE INFORMATION OR ADVICE RESPECTING ANY PRODUCT OR EQUIPMENT.
PLEASE REFER TO RELEVANT MATERIAL SAFETY DATA SHEETS, PRODUCT DATA SHEETS AND/OR PRODUCT LABELS FOR SAFE USE, STORAGE, HANDLING, AND DISPOSAL OF PRODUCTS, OR CONSULT WITH YOUR LOCAL CHESTERTON SALES REPRESENTATIVE.



DISTRIBUTED BY:

860 Salem Street
Groveland, MA 01834 USA
Telephone: 781-438-7000
Fax: 978-469-6528
www.chesterton.com

© A.W. Chesterton Company, 2010. All rights reserved.
® Registered trademark owned and licensed by
A.W. Chesterton Company in USA and other countries.

FORM NO. 088830

PRINTED IN USA 7/10